


CONTRASTING STRIPE, PHOTOLUMINESCENT MARKING, ADDED SLIP RESISTANCE

RETROFIT / SURFACE MOUNT 2" STAIR NOSING WITH INSERT STRIP

MODEL: STNR

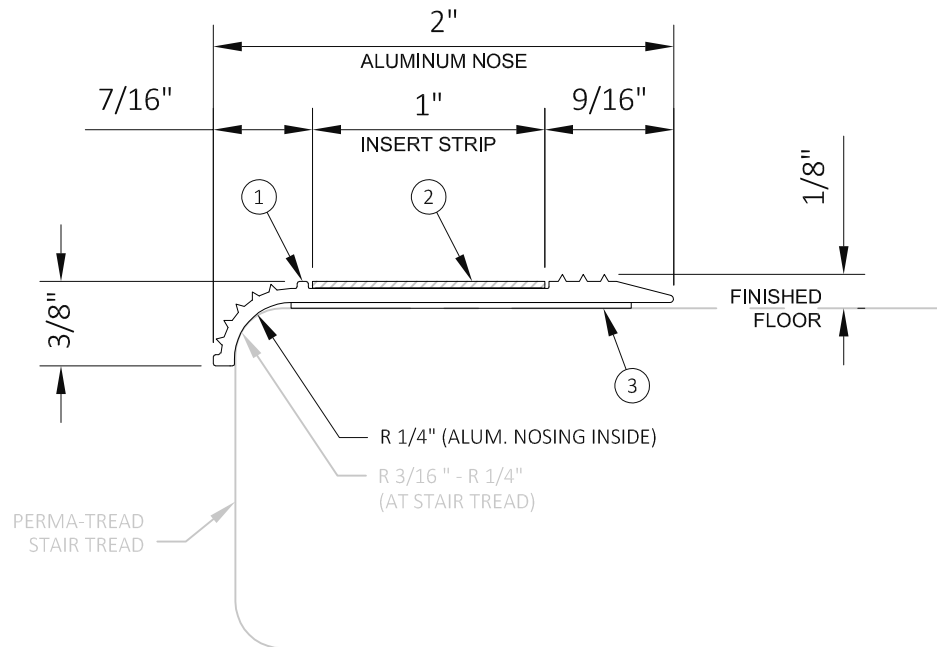

SPECIFICATIONS:

1. EXTRUDED ALUMINUM ALLOY 6063-T5
  - (a) Mill Finish
  - (b) Clear Anodize
  - (c) Yellow Powder Coat
  - (d) Black Powder Coat
2. 1" INSERT STRIP (shop applied):
  - (a) Photo-Glo STNF
  - (b) Photo-Glo S9203
  - (c) Traction Yellow
  - (d) Traction Black
3. ATTACHMENT:
  - (a) Excluded (by others)
  - (b) Liquid Adhesive (field applied)
  - (c) Mechanical Screw (field applied)
4. LENGTH: 12' - 0" MAX.
5. ASTM 2072 / UL 1994

CONTACT NATIONAL STAIR PRODUCTS FOR BEST PRACTICES AND INSTALLATION INSTRUCTIONS.

**PERMA-TREAD™**

(971) 772-4553 | sales@nationalstair.com | www.nationalstair.com

PERMA-TREAD  
STAIR NOSING / CONTRASTING STRIPE



SCALE: N.T.S.

DWG #:

PT-0.2

**Safe-T-Nose®**  
WWW.SAFETNOSE.COM

1-855-723-6673  
SALES@SAFETNOSE.COM  
1640 SALEM INDUSTRIAL DR. NE  
SALEM, OREGON 97301