


# TEMP TREAD - MODULAR

(PROVIDE) (X)  
INSIDE STRINGER TO STRINGER  
DIMENSION

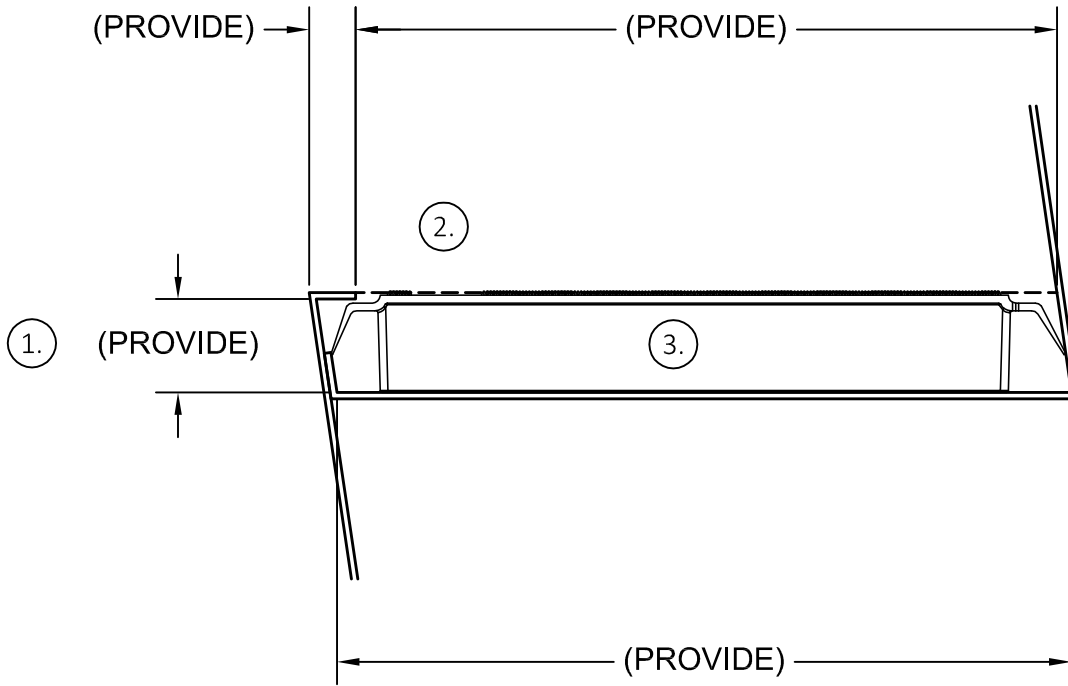

NOTE:  
CUSTOMER TO "PROVIDE" SHOWN  
DIMENSIONS TO CONFIRM FITMENT.  
REDLINE DRAWING AND RETURN.

## OPTIONS:

- 1. CONCRETE FILL THICKNESS
  - (a) 1.50 INCH
  - (b) 1.75 INCH
  - (c) 2.00 INCH
  - (d) UNKNOWN
- 2. OSHA SAFETY STRIPE:
  - (a) NO
  - (b) YES
  - (c) UNKNOWN
- 3. FIRE RATED MATERIAL:
  - (a) NO
  - (b) YES
  - (c) UNKNOWN
- 4. LENGTH: 20" EACH
- 5. WEIGHT: 2 LBS EACH

	(INCHES)
QTY:	(X) DIM.

REQUEST DATE:

ON SITE DATE:

PROJECT NAME:



(971) 772-4553 | sales@nationalstair.com | www.nationalstair.com

TEMP TREAD - TEMPORARY STAIR TREADS  
FITMENT ORDER SHEET - PAN FILLED STAIRS



SCALE: N.T.S.

DWG #: TT-1.0