
TREADX - UNIVERSAL

(PROVIDE)(X) INSIDE STRINGER TO STRINGER **DIMENSION**

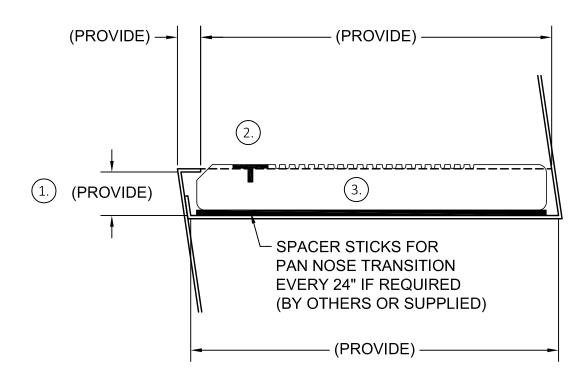

NOTE: CUSTOMER TO "PROVIDE" SHOWN DIMENSIONS TO CONFIRM FITMENT. REDLINE DRAWING AND RETURN.

SCALE: N.T.S.

DWG #:

TT-2.0

WEIGHT: 6.5 LBS / LF

	OPTIONS:				
1.	STAIR PAN THICKNESS (a) 1.50 INCH (b) 1.75 INCH (c) 2.00 INCH (d) UNKNOWN	QTY:	(INCHES) (X) DIM.		E DATE:
2.)	OSHA SAFETY STRIPE: □ (a) NO □ (b) YES □ (c) UNKNOWN			PROJEC	CT NAME:
3.)	FIRE RATED MATERIAL: (a) NO (b) YES			(9	71) 772-4553 sales@nationalstair.com www.nationalstair.com
4.	□ (c) UNKNOWN LENGTH: 144" MAX.			FITN	TREADX - TEMPORARY STAIR TREADS MENT ORDER SHEET - PAN FILLED STAIRS